

VT6B - B09 - 1 R 00 - D 1 02 *

Series

Cam ring

Volumetric displacement cm³/rev (in³/rev)

B02 = 5.8 (0.35)	B08 = 24.9 (1.52)
B03 = 9.8 (0.59)	B09 = 28.0 (1.71)
B04 = 12.8 (0.78)	B10 = 31.8 (1.94)
B05 = 15.9 (0.97)	B11 = 34.9 (2.13)
B06 = 19.8 (1.21)	B12 = 41.0 (2.50)(cont. 175 bar, Max. int 210 bar)
B07 = 22.5 (1.37)	B14 = 45.0 (2.75)(cont. 140 bar, Max. int 175 bar)

Type of Shaft


- 1 - Keyed (Non SAE)
- 2 - Keyed
- 3 - Splined (SAE A)
- 4 - Splined (SAE B)
- 5 - Splined SAE (11 teeth)
- 11 - Splined

Direction of rotation (view on shaft end)

- R - clockwise
- L - counter-clockwise

Porting combination

00 - standard



S - Suction port **P** - Pressure port

Modifications

Port connections

CODE	S	P
00	SAE 20 1-5/8" 12 UNF-2B	SAE 12 1-1/16" 12 UNF-2B
01	1-1/4" SAE 4 bolt (UNC)	3/4" SAE 4 bolt (UNC)
M0	1-1/4" SAE 4 bolt (METRIC)	3/4" SAE 4 bolt (METRIC)
02	1-1/4" BSP	3/4" BSP
03	1-1/4" NPTF	SAE 12 1-1/16" 12 UNF-2B
0X	1-1/4" NPTF	3/4" NPTF


Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)


Design letter

VP
SP

INTERNAL LEAKAGE (TYPICAL)

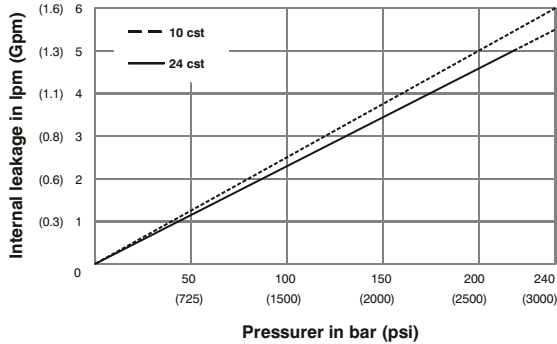

PERMISSIBLE RADIAL LOAD

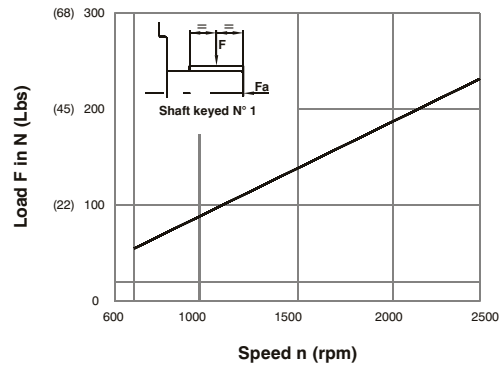


OPERATING CHARACTERISTICS (24 cSt)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 210 bar (3000 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 210 bar (3000 psi)	
				in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw
VT6B	B02	0.35	5.8	2.30	8.7	1.4	5.9	--	--	0.53	0.4	2.81	2.1	--	--
	B03	0.59	9.8	3.88	14.7	2.9	11.9	2.7	10.5	0.67	0.5	3.62	2.7	--	--
	B04	0.78	12.8	5.08	19.2	4.33	16.4	3.97	15.0	0.93	0.7	5.23	3.9	10.06	7.5
	B05	0.97	15.9	6.31	23.8	5.55	21.0	5.18	19.6	1.00	0.75	6.64	4.9	11.2	8.3
	B06	1.21	19.8	7.85	29.7	7.12	26.9	6.66	25.2	1.07	0.8	8.05	6.0	12.34	9.2
	B07	1.37	22.5	8.92	33.7	8.17	30.9	7.80	29.5	1.20	0.9	9.05	6.7	14.02	10.4
	B08	1.52	24.9	9.89	37.4	9.15	34.6	8.78	33.2	1.34	1.0	10.05	7.5	15.69	11.7
	B09	1.71	28.0	11.11	42.0	10.37	39.2	10.00	37.8	1.47	1.1	11.94	8.9	23.60	17.6
	B10	1.94	31.8	12.61	47.7	11.87	44.9	11.51	43.5	1.6	1.2	13.0	9.7	26.0	19.6
	B11	2.13	34.9	13.85	52.3	13.09	49.5	12.72	48.1	1.7	1.3	14.0	10.5	28.0	21.0
	B12	2.50	41.0	16.27	61.5	15.53	58.7	*	*	1.8	1.4	15.02	11.2	*	*
	B14	2.75	45.0	17.86	67.5	17.12	64.7	**	**	2.1	1.6	15.42	11.5	**	**


- Not to use because internal leakage greater than 50% of theoretical flow.

* B12 = 210 bar(3000 psi) Max.Int


** B14 = 175 bar(2500 psi) Max.Int

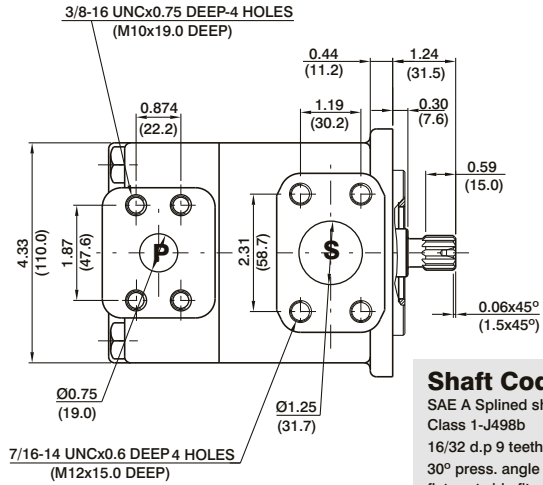

Shaft Code 3
 SAE A Splined shaft
 Class 1-J498b
 16/32 d.p 9 teeth
 30° press. angle
 flat root side fit




Shaft Code 4
 SAE B Splined shaft
 Class 1-J498b
 16/32 d.p 13 teeth
 30° press. angle
 flat root side fit




Shaft Code 11
 Splined shaft
 Class 1-J498b
 16/32 d.p 11 teeth
 30° press. angle
 flat root side fit


VP
SP

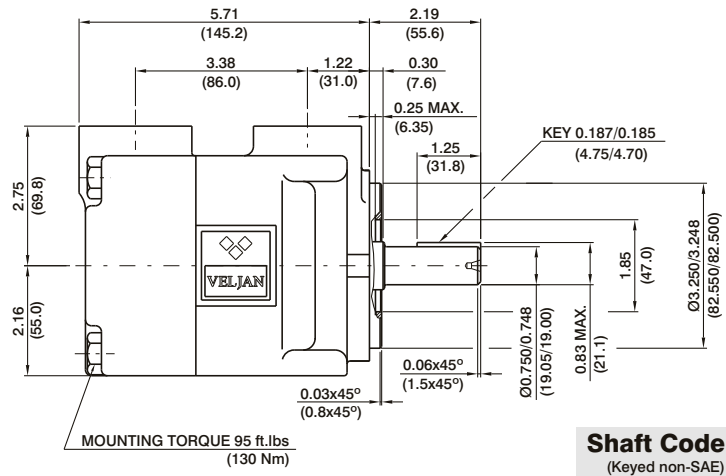

Shaft Code 1
 (Keyed non-SAE)




Shaft torque limits in ³ /revpsi(ml/revxbar)	
Shaft	Vp x p max.
3	5119 (5780)
4	18246 (20600)

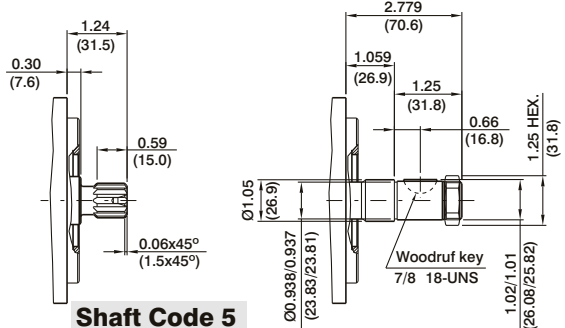


Shaft Code 5
 SAE Splined shaft
 Class 1-J498b
 16/32 d.p 11 teeth
 30° press. angle
 flat root side fit

Shaft Code 2
 Woodruff key
 Recommended
 nut Torque
 125 ft.lbs (170 Nm)

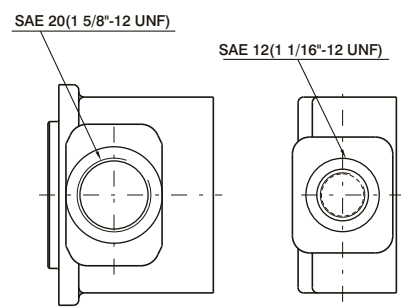

PORT CONNECTION 00

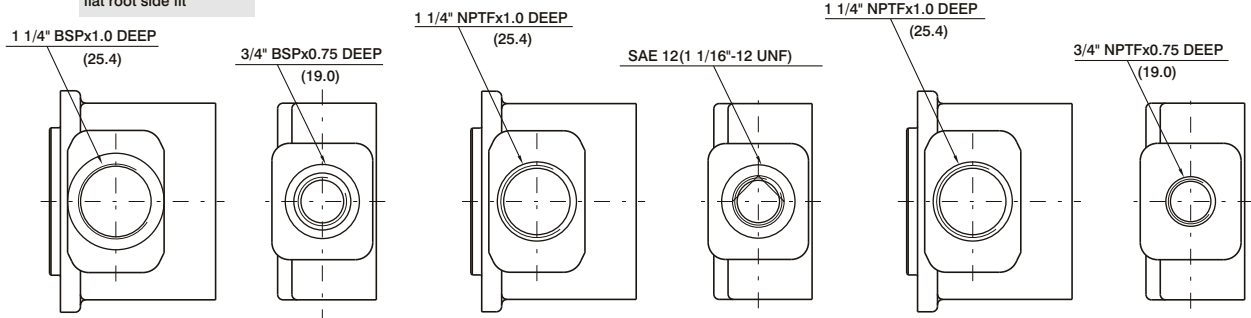

PORT CONNECTION 02

PORT CONNECTION 03

PORT CONNECTION 0X